

U.S. DEPARTMENT OF COMMERCE
National Technical Information Service

NACA WRL 23

VARIATION WITH MACH NUMBER OF STATIC AND TOTAL
PRESSURES THROUGH VARIOUS SCREENS

NATIONAL ADVISORY COMMITTEE FOR AERONAUTICS
WASHINGTON, DC

FEB 1946

NACA. WRL. 23

NATIONAL ADVISORY COMMITTEE FOR AERONAUTICS

WARTIME REPORT

ORIGINALLY ISSUED

February 1946 as
Confidential Bulletin L5F28

VARIATION WITH MACH NUMBER OF STATIC AND TOTAL

PRESSURES THROUGH VARIOUS SCREENS

By Alfred A. Adler

Langley Memorial Aeronautical Laboratory
Langley Field, Va.

REPRODUCED BY
U.S. DEPARTMENT OF COMMERCE
NATIONAL TECHNICAL
INFORMATION SERVICE
SPRINGFIELD, VA 22161

NACA

WASHINGTON

NACA WARTIME REPORTS are reprints of papers originally issued to provide rapid distribution of advance research results to an authorized group requiring them for the war effort. They were previously held under a security status but are now unclassified. Some of these reports were not technically edited. All have been reproduced without change in order to expedite general distribution.

REPRODUCED BY
NATIONAL TECHNICAL
INFORMATION SERVICE
U. S. DEPARTMENT OF COMMERCE
SPRINGFIELD, VA. 22161

VARIATION WITH MACH NUMBER OF STATIC AND TOTAL
PRESSURES THROUGH VARIOUS SCREENS

By Alfred A. Adler

SUMMARY

Tests were conducted in the Langley 24-inch high-speed tunnel to ascertain the static-pressure and total-pressure losses through screens ranging in mesh from 3 to 12 wires per inch and in wire diameter from 0.023 to 0.041 inch. Data were obtained from a Mach number of approximately 0.20 up to the maximum (choking) Mach number obtainable for each screen.

The results of this investigation indicate that the pressure losses increase with increasing Mach number until the choking Mach number, which can be computed, is reached. Since choking imposes a restriction on the mass rate of flow and maximum losses are incurred at this condition, great care must be taken in selecting the screen mesh and wire diameter for an installation so that the choking Mach number is not approached at the maximum operating velocity.

INTRODUCTION

In the design of ducts for aircraft it has become necessary to know the losses in static and total pressure through screens installed within these ducts. Data on the losses through screens at low speeds have long been available, but for current aircraft ducting problems data on the losses through screens at high speeds are necessary. Tests were therefore conducted in the Langley 24-inch high-speed tunnel to ascertain the static-pressure and total-pressure losses through screens ranging in mesh from 3 to 12 wires per inch and in wire diameter from 0.023 to 0.041 inch, at Mach numbers from approximately 0.20 to the maximum (choking) Mach number obtainable for each screen.

SYMBOLS

M	Mach number ahead of screen
M_{choke}	choking Mach number, also known as limiting Mach number, the Mach number ahead of screen at which a Mach number of 1 is obtained completely across openings in screen
ΔH	total-pressure loss through screen
Δp	static-pressure drop through screen
q	dynamic pressure ahead of screen
c_d	section drag coefficient $\left(\frac{\text{Drag/Unit area}}{q} \right)$
m	mesh, wires per inch
d	wire diameter, inch
S	screen solidity, ratio of blocked area to original free area $(2md - m^2d^2)$
ρ_1	density ahead of screen
u_1	velocity ahead of screen
u_2	velocity downstream from screen

APPARATUS AND METHODS

The Langley 24-inch high-speed tunnel, in which these tests were run, is a nonreturn, induction-type tunnel with the induction nozzle placed downstream from the test section (reference 1). The total pressure throughout the test section is therefore equal to atmospheric pressure, except for a negligible loss through the entrance screens.

Each screen was supported for tests within a 16-inch length of seamless steel tubing having an inside diameter of $5\frac{1}{2}$ inches (fig. 1), which was mounted

longitudinally in the test section of the tunnel by means of $\frac{1}{16}$ -inch-diameter steel cables.

The Mach number was determined from the static pressure ahead of the screen, which was measured by means of two diametrically opposed static-pressure orifices located in the walls of the supporting tube 3 inches ahead of the screen. The static pressure behind the screen was measured by means of two additional static-pressure orifices located at a distance of 4 inches behind the screen. The total-pressure loss through the screen was taken as the difference between atmospheric pressure and the total pressure as indicated by two tubes placed behind the screen with the noses in the same plane as the static-pressure orifices. The tube-entrance losses were assumed to be negligible.

RESULTS AND DISCUSSION

The data for all the screens tested are presented in figures 2 and 3, which show the static-pressure drop and total-pressure loss, respectively, plotted against Mach number. The data show, mainly, that both static-pressure drop and total-pressure loss, in percent of dynamic pressure, increase with increasing Mach number until the highest obtainable test Mach number is reached. This Mach number is known to correspond to the choked condition, since further increase in tunnel speed did not increase the Mach number ahead of the screen.

The data of figures 2 and 3, plotted in terms of screen solidity rather than mesh and wire diameter, are presented in figures 4 and 5. From these figures it can be seen that the pressure losses are dependent only on screen solidity and Mach number within the range of this investigation.

Figure 6 shows drag coefficient c_d plotted against Mach number. These values of drag coefficient were obtained from the equation

$$c_d = \frac{\Delta p}{q} - \frac{\rho_1 u_1 (u_2 - u_1)}{q}$$

This equation was derived on the assumption that conditions were uniform across the wake. As was expected, the data show that the drag coefficient increases with increase in Mach number.

Since choking of the flow through a tube occurs when a Mach number of 1 is reached at the cross section of minimum area, choking of the flow would be expected to occur when a Mach number of 1 is obtained completely across the openings in the screen. This choking fixes a limit to the Mach number that can be obtained in the flow ahead of the screen. There are now two possibilities. If the total pressure ahead of the screen is maintained constant, no further increase in mass rate of flow is possible. Any decreases in back pressure will only increase the losses through the screen. If, however, the total pressure ahead of the screen is increased - as is possible in flight - the mass rate of flow can be increased. This increase in mass rate of flow will be accompanied by large losses and will progress at a far lesser rate than for speeds below choking. It is highly desirable therefore that care be taken in the selection of screen mesh and wire diameter so that the choking Mach number is not approached at the maximum operating velocity. The following equation, derived from the continuity equation, the adiabatic law, and Bernoulli's equation for compressible flow, relates the speed at which this choking occurs to the screen variables:

$$1 - 2md + m^2d^2 = \frac{M_{choke}}{0.579 (1 + 0.2M_{choke}^2)^{3/2}}$$

This relation, presented graphically in figure 7 in terms of the screen variables and in figure 8 in terms of screen solidity, shows good agreement with the experimentally determined choking Mach numbers.

CONCLUDING REMARKS

Tests in the Langley 24-inch high-speed tunnel to ascertain the static- and total-pressure losses through screens indicate that the losses increase with increasing

DECLASSIFIED

NACA CB No. L5F28

5

Mach number until the choking Mach number, which can be computed, is reached. Because choking imposes a restriction on the mass rate of flow and because maximum losses are incurred at this condition, great care must be taken in selecting the screen mesh and wire diameter for an installation so that the choking Mach number is not approached at the maximum operating velocity.

Langley Memorial Aeronautical Laboratory
National Advisory Committee for Aeronautics
Langley Field, Va.

REFERENCE

1. Stack, John, Lindsey, W. F., and Littell, Robert E.: The Compressibility Burble and the Effect of Compressibility on Pressures and Forces Acting on an Airfoil. NACA Rep. No. 646, 1938.

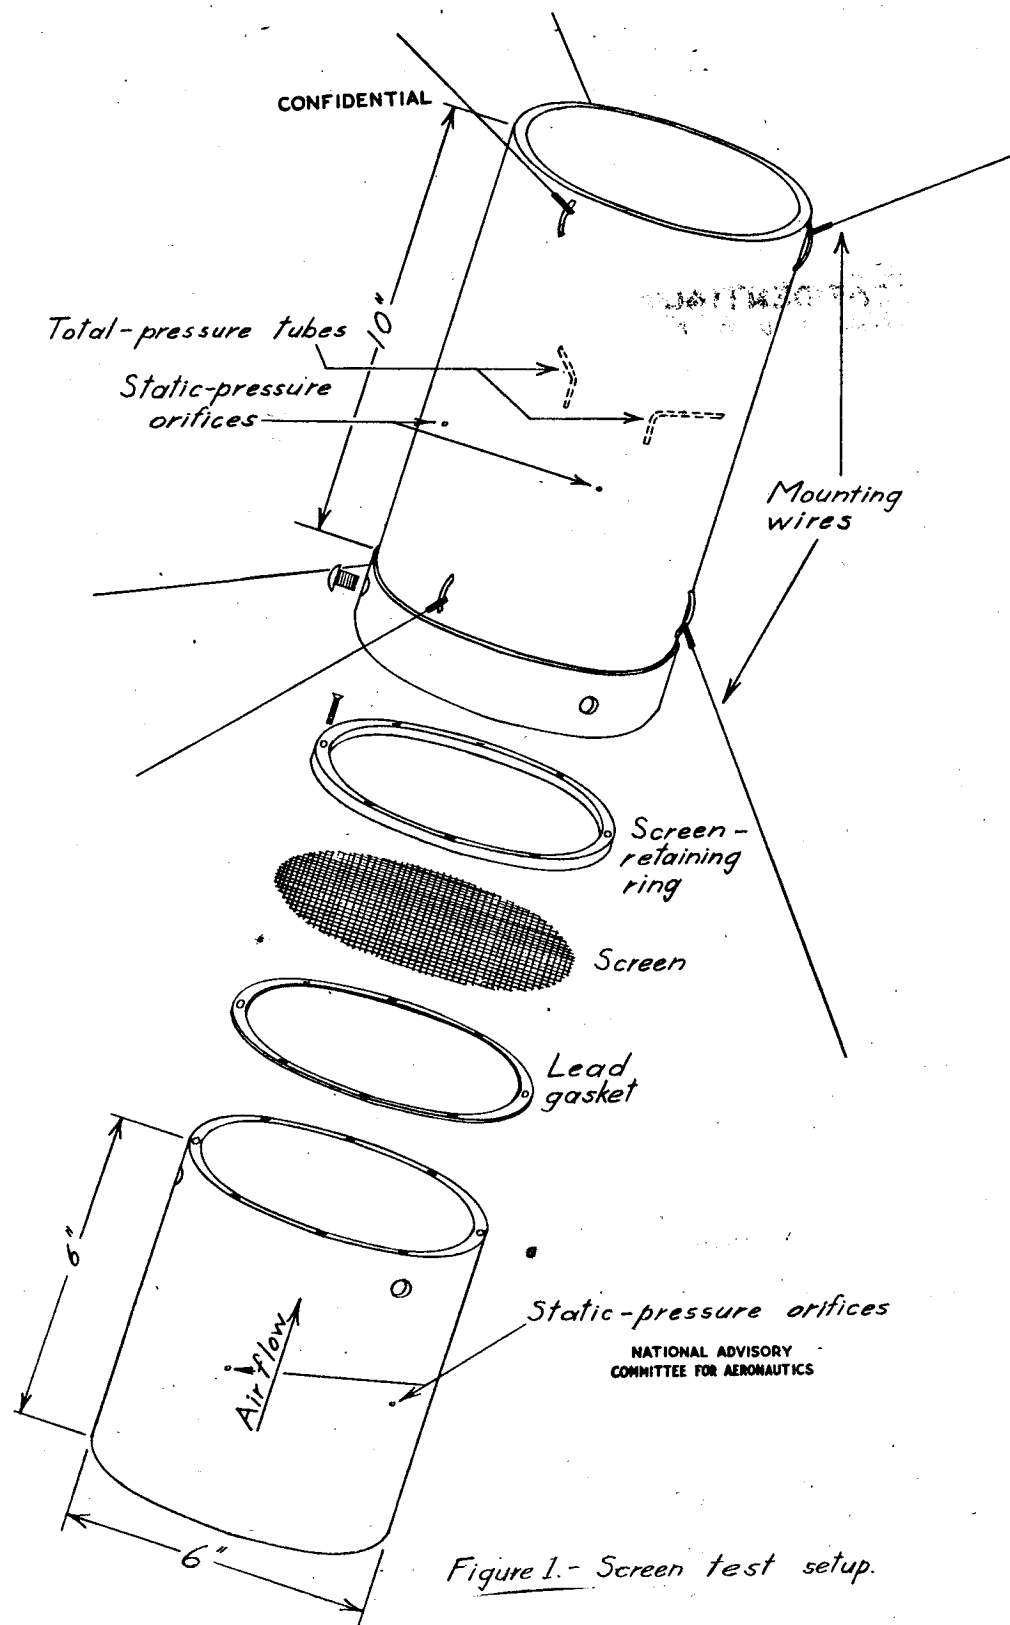


Figure 1.- Screen test setup.

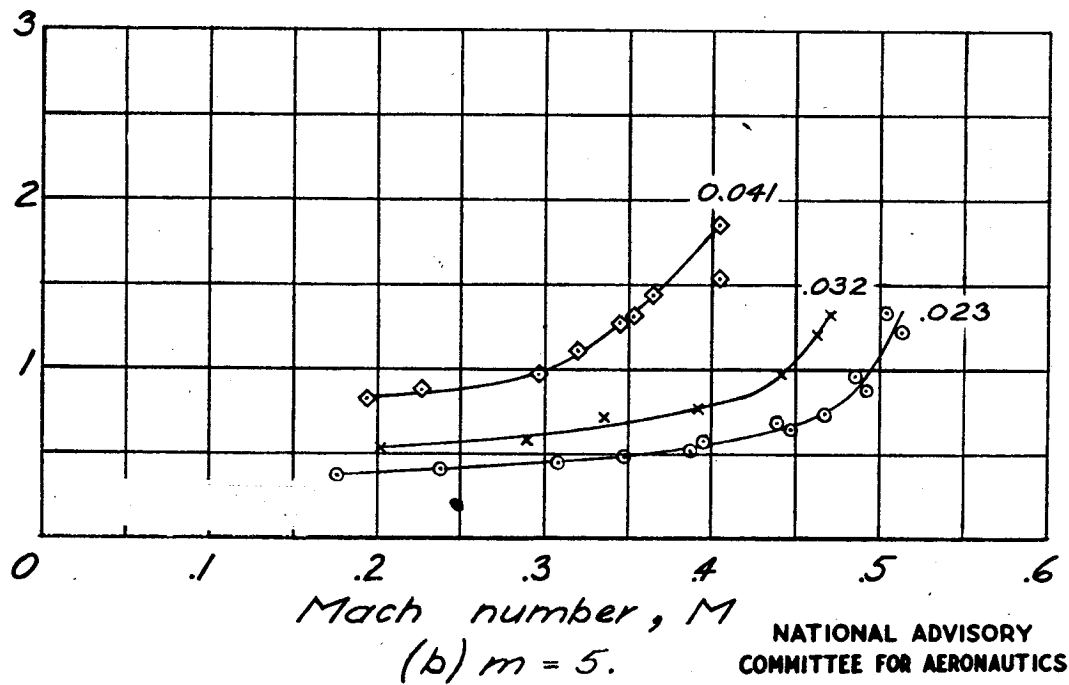
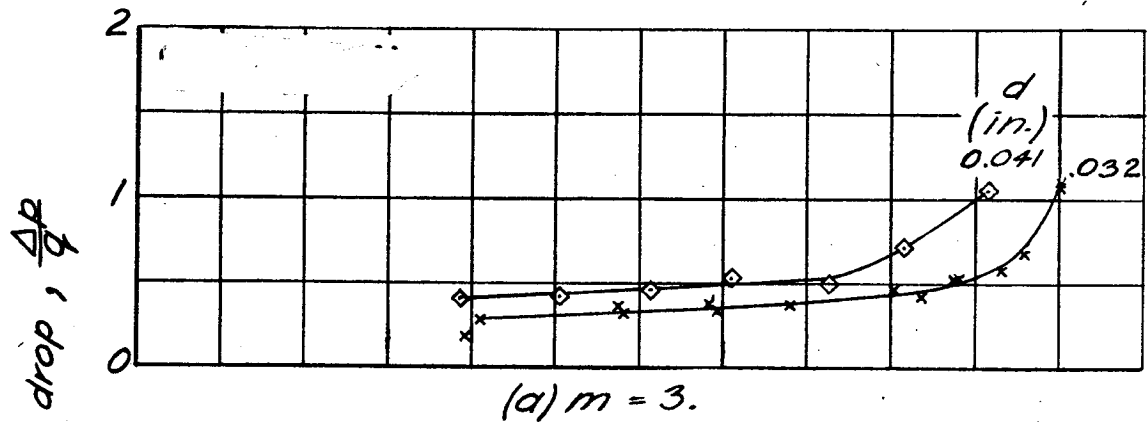


Figure 2.- Variation of static-pressure drop through screens with Mach number.

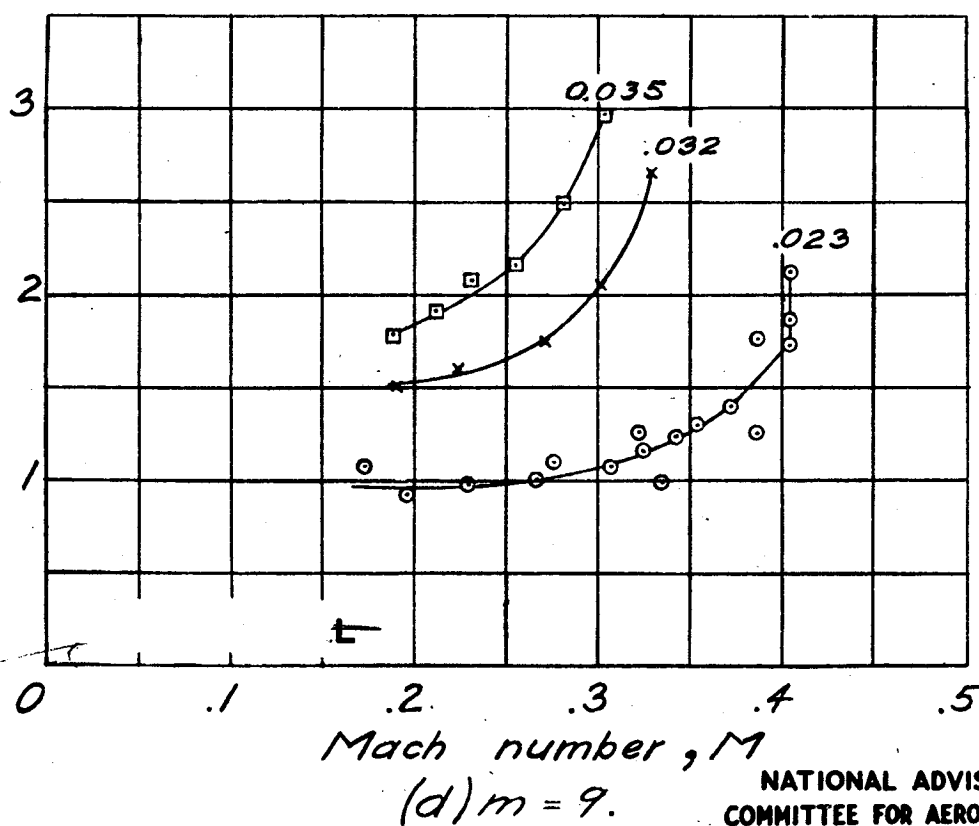
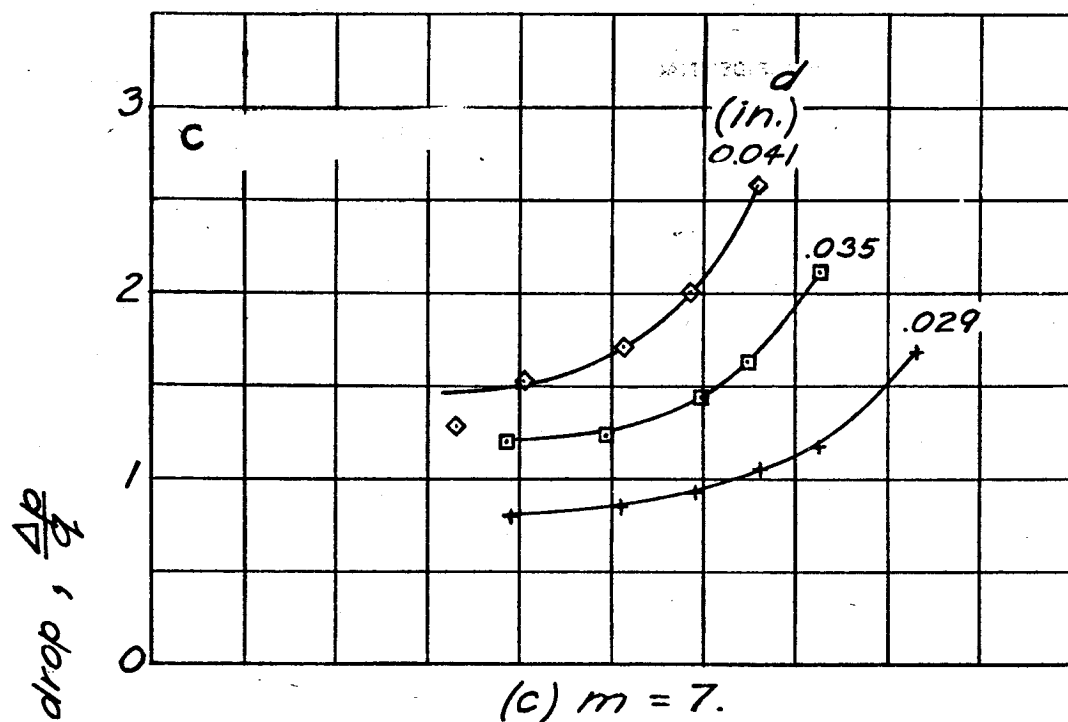


Figure 2. - Continued.

Fig. 2e

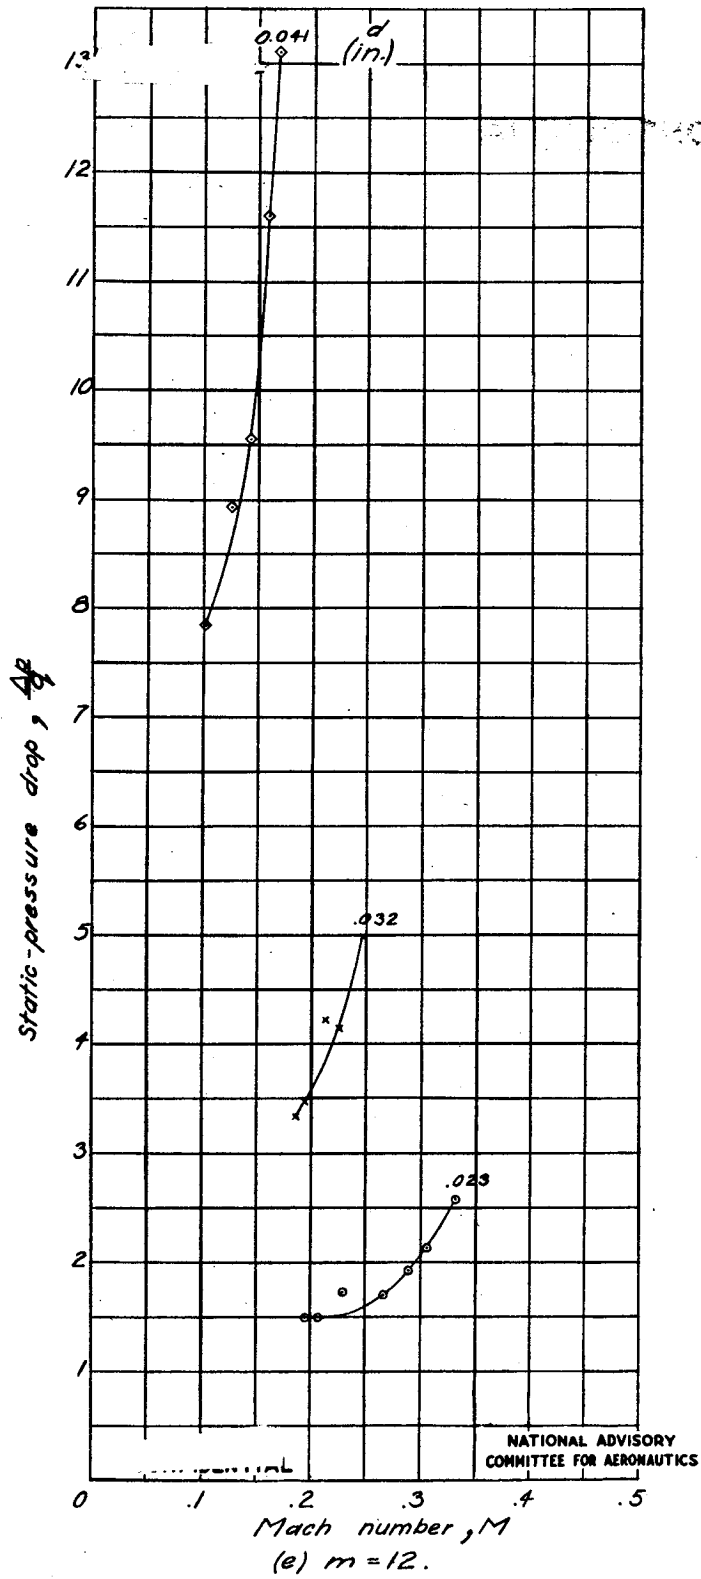


Figure 2.- Concluded.

Fig. 3c,d

03712001000

NACA CB No. L5F28

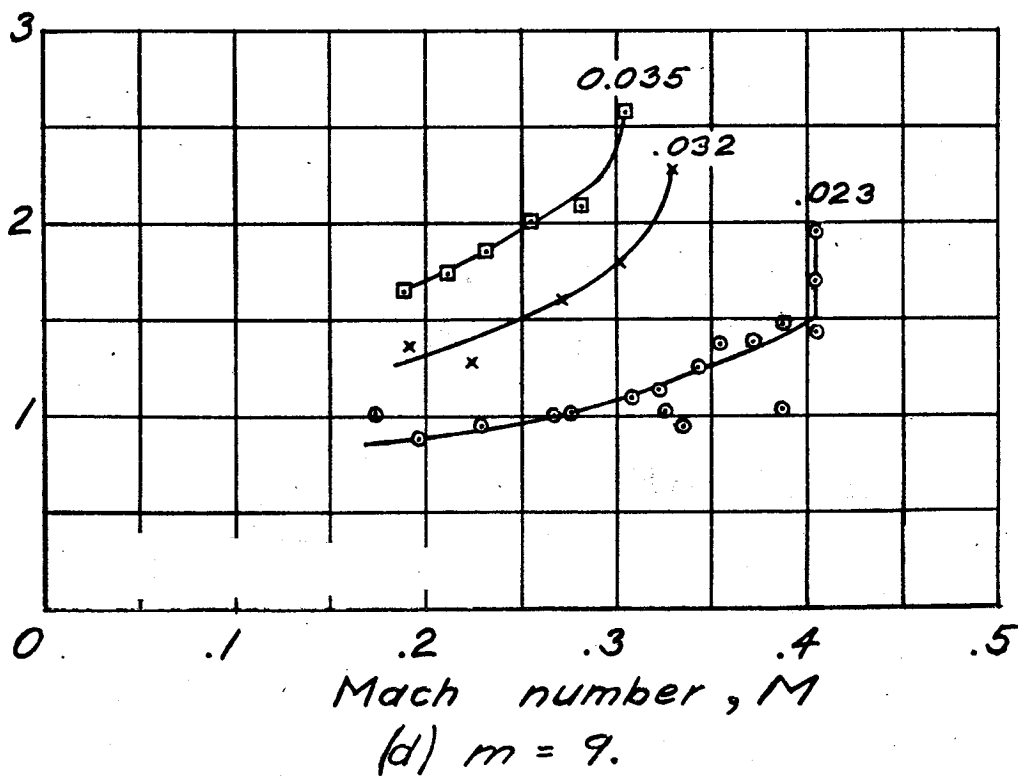
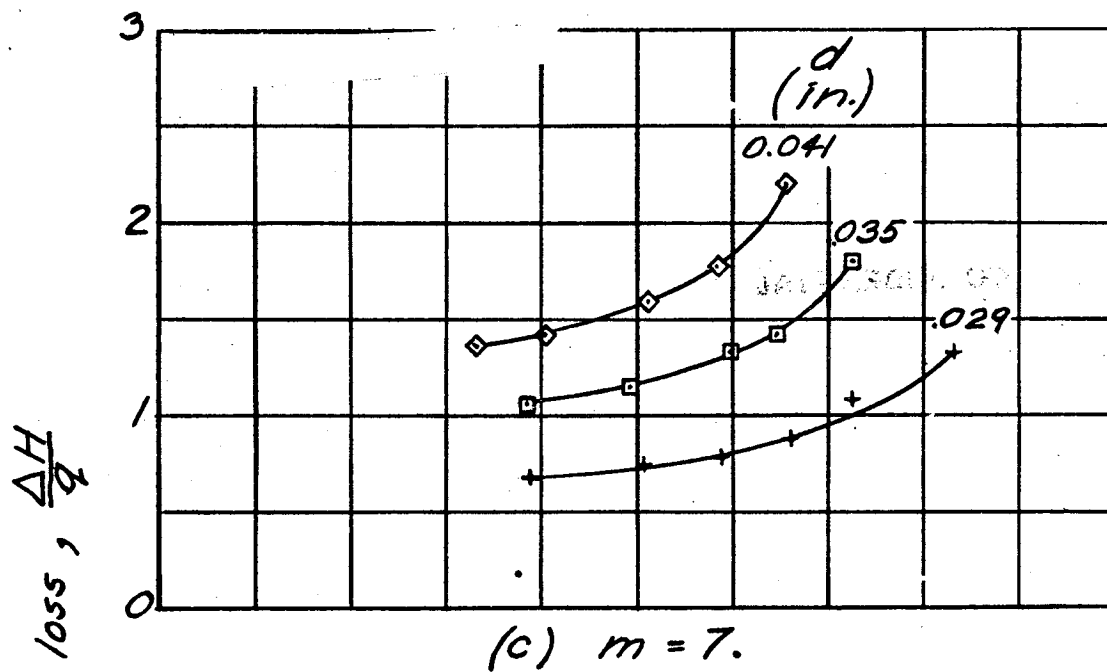


Figure 3.- Continued.

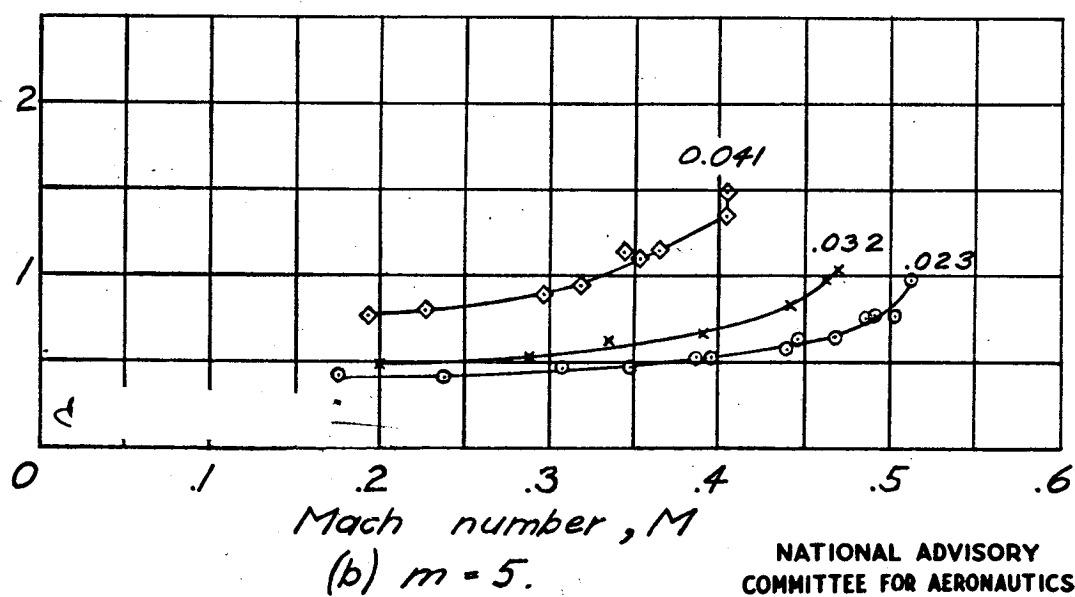
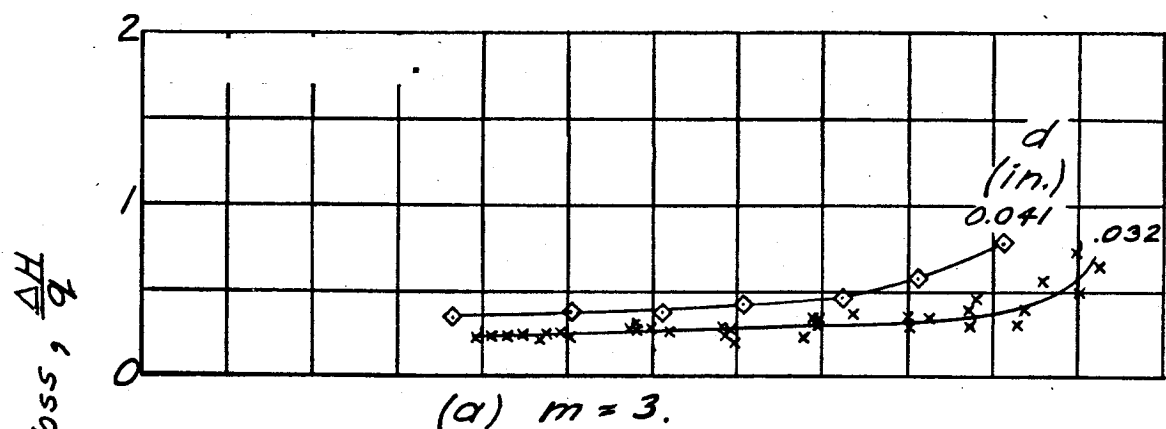


Figure 3. - Variation of total-pressure loss through screens with Mach number.

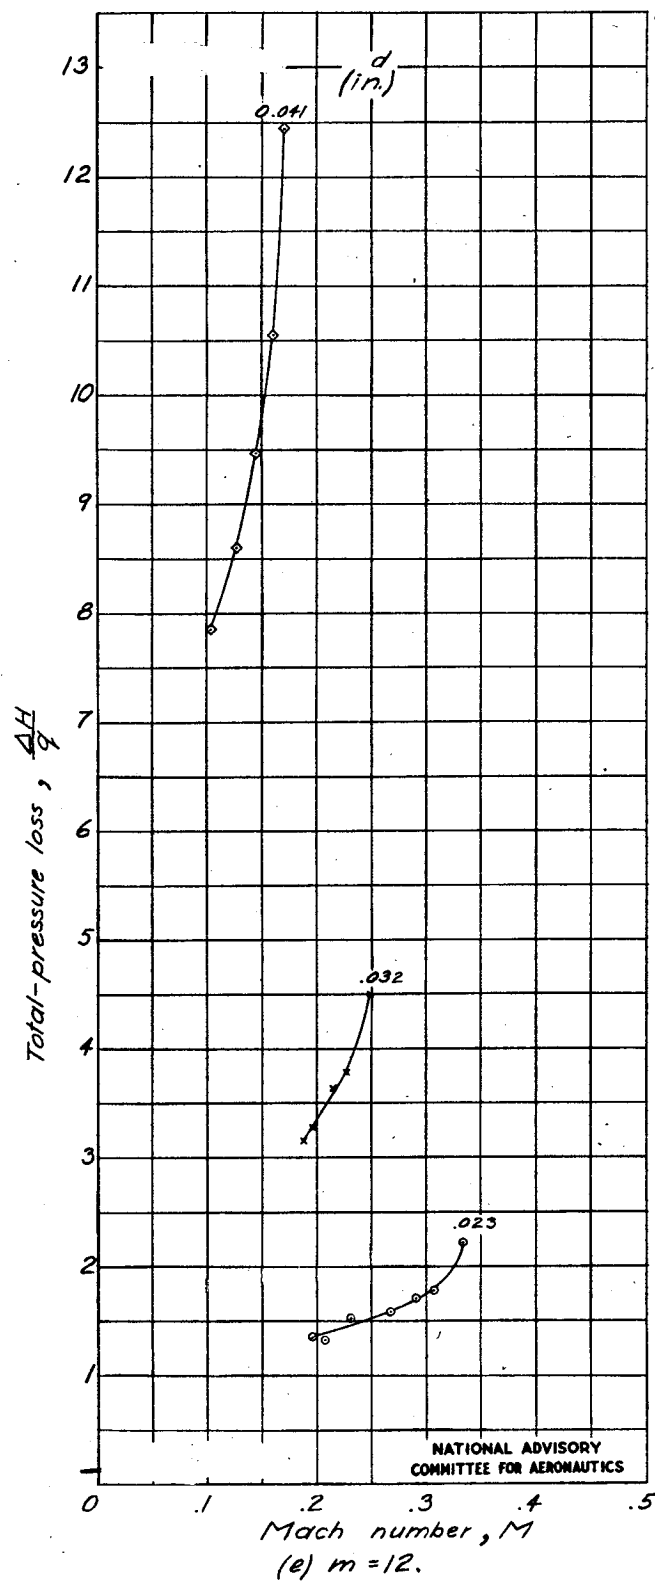


Figure 3. - Concluded.

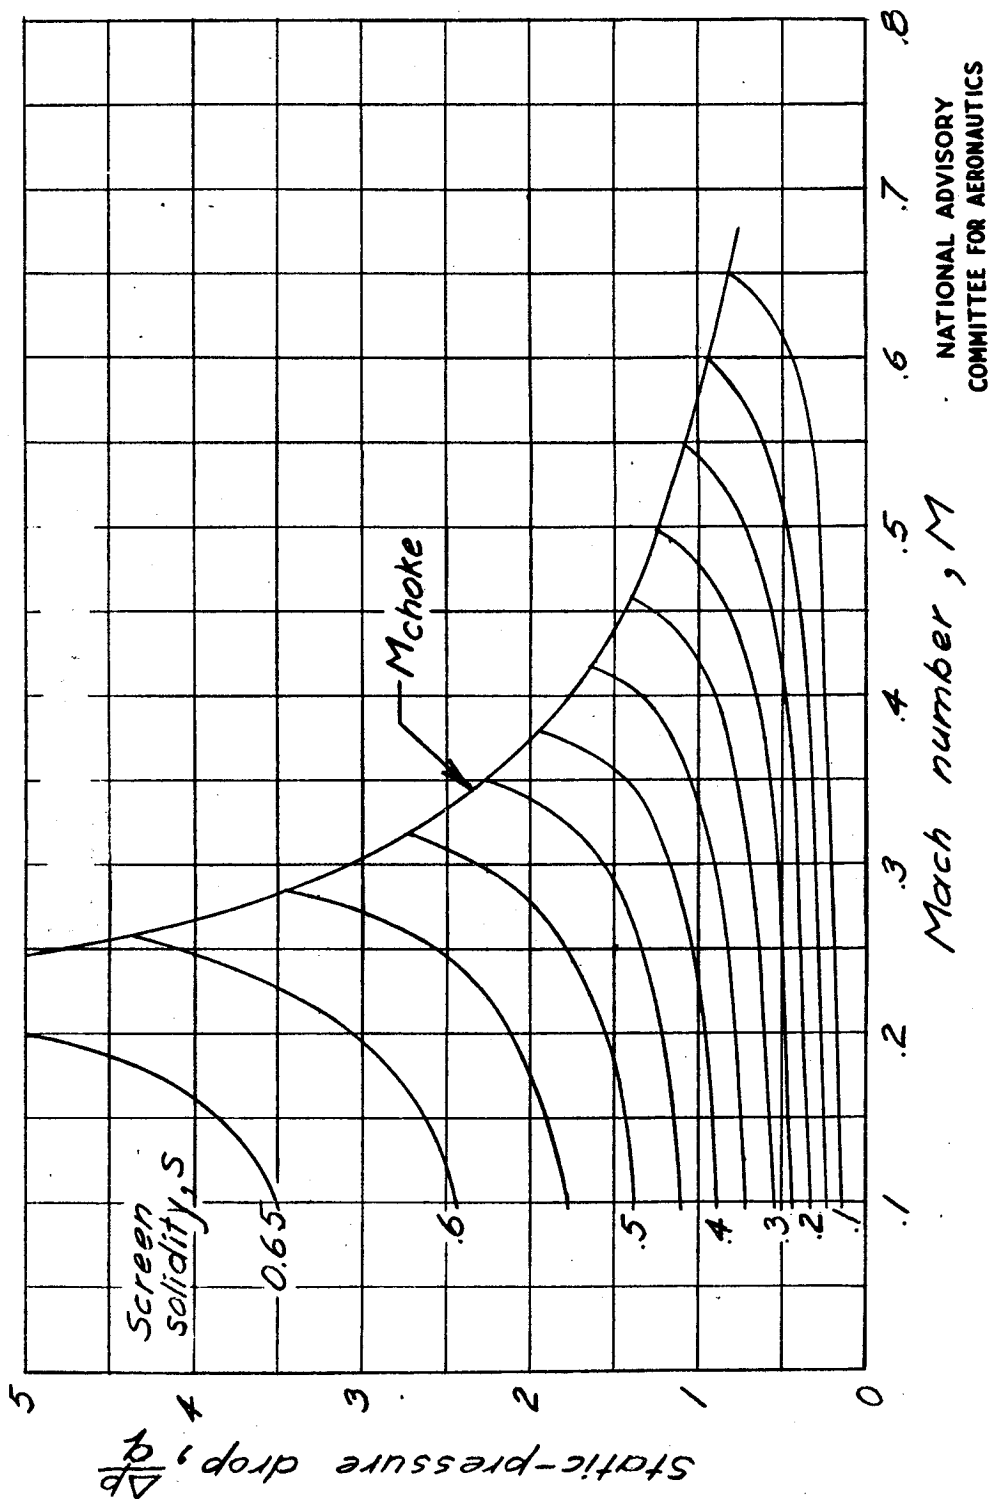


Figure 4. - Effect of compressibility on the static-pressure drop through screens of various solidities.

41

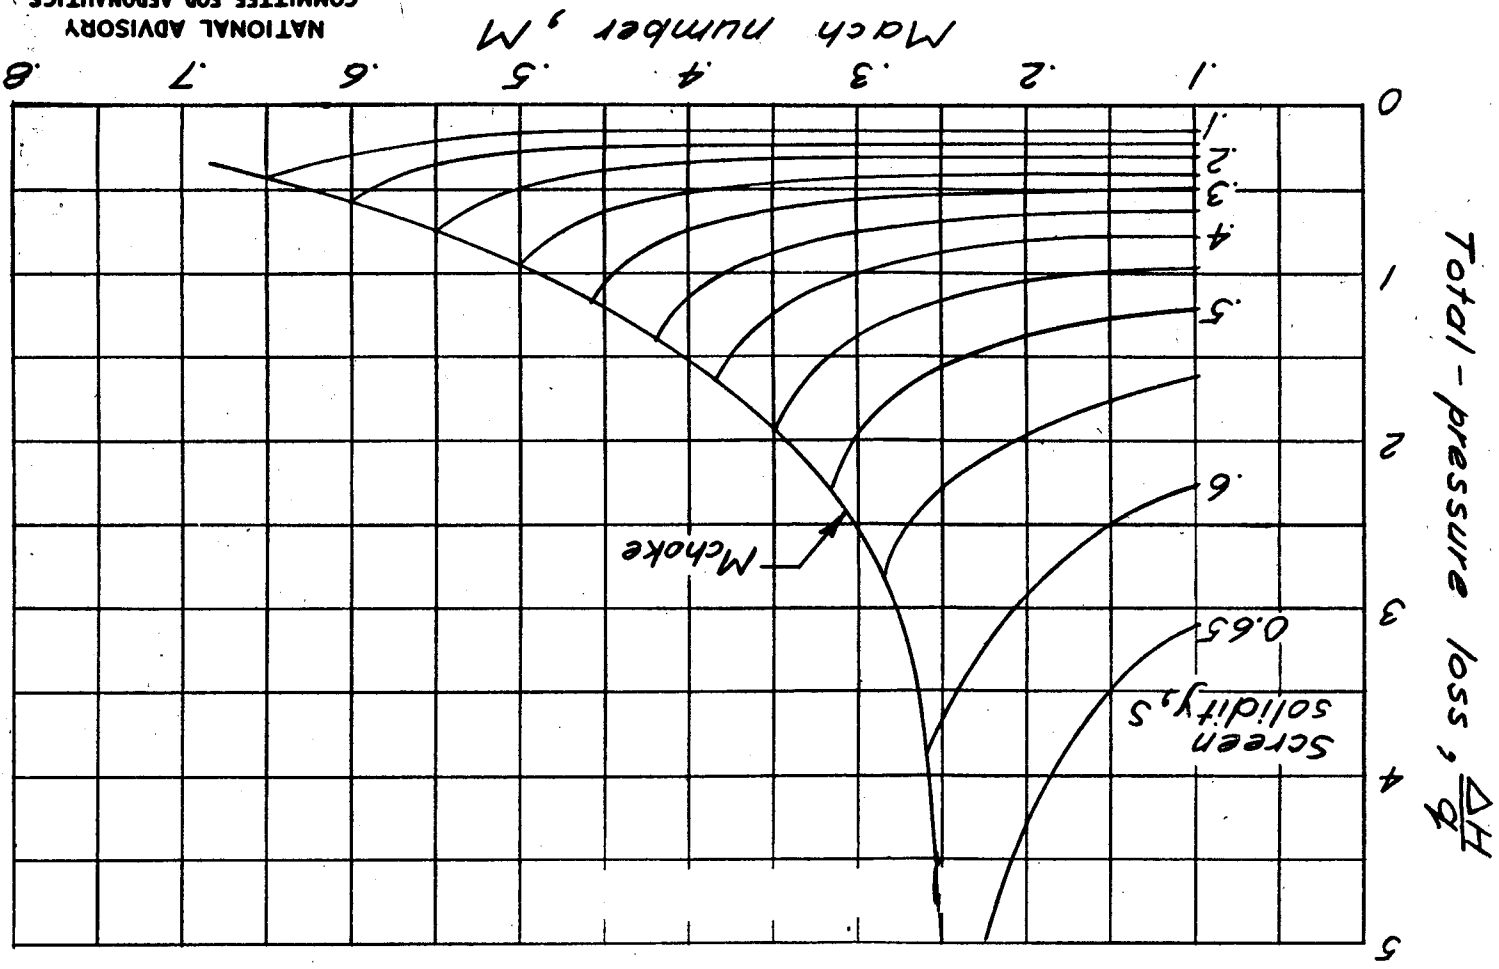


Figure 5.-Effect of compressibility on the total-pressure loss through screens of various solidities.

NATIONAL ADVISORY
COMMITTEE FOR AERONAUTICS

Fig. 5

Fig. 6a,b.

037122A 1988

NACA CB No. L5F28

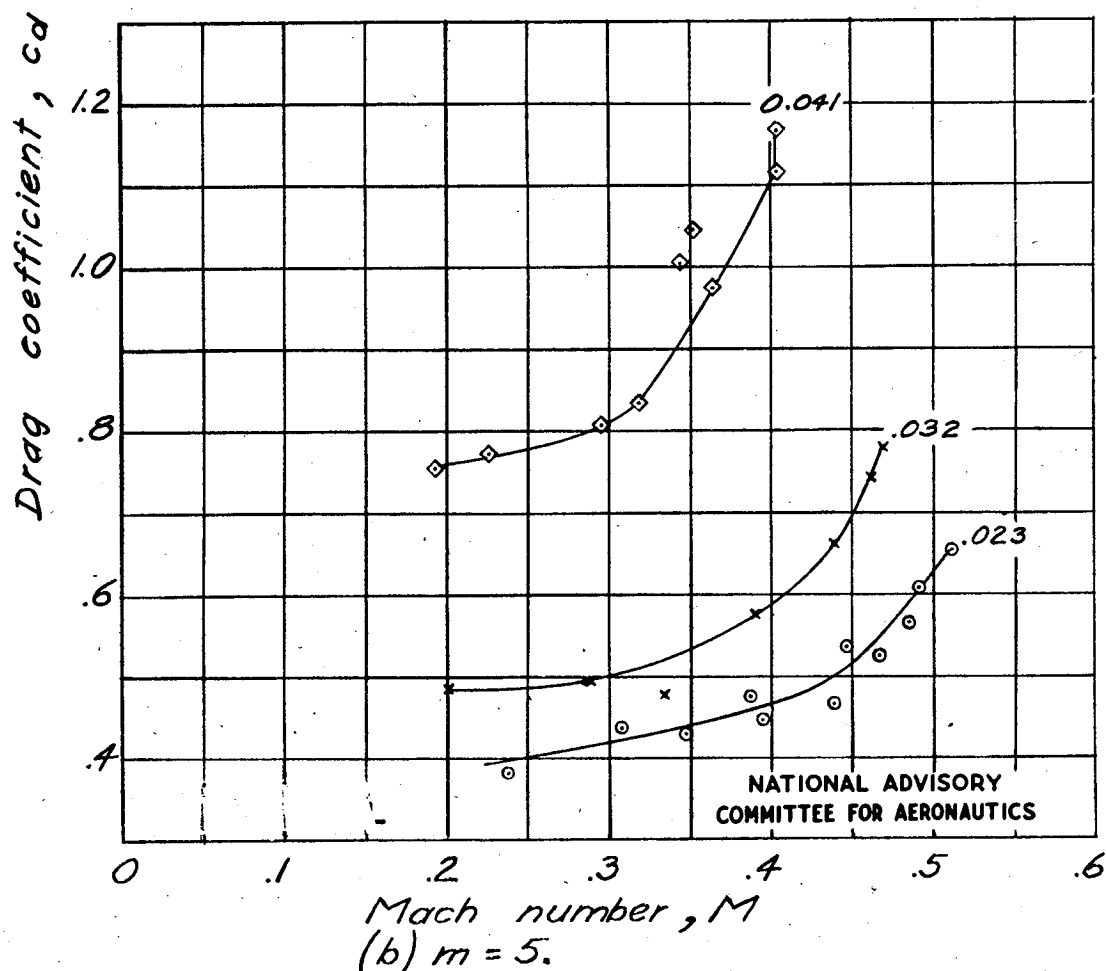
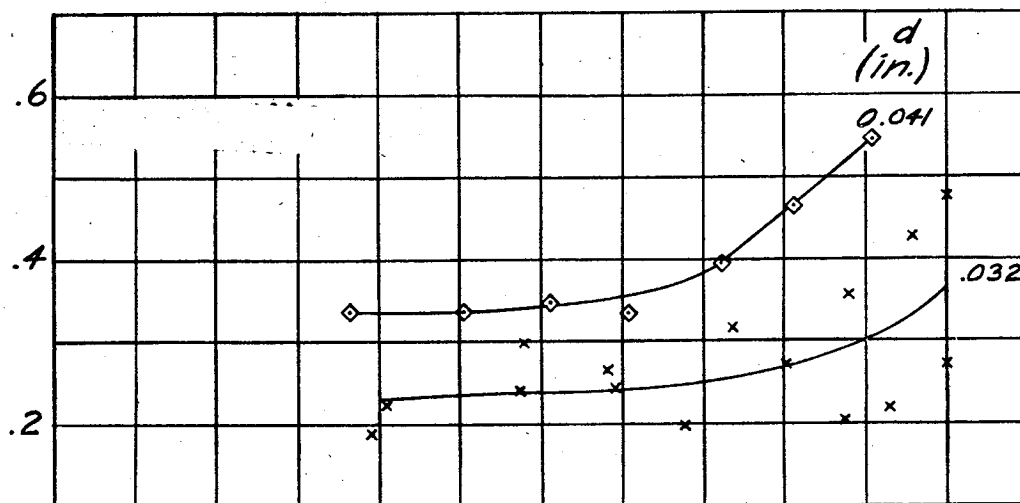


Figure 6.- Variation of drag coefficient of screens with Mach number.

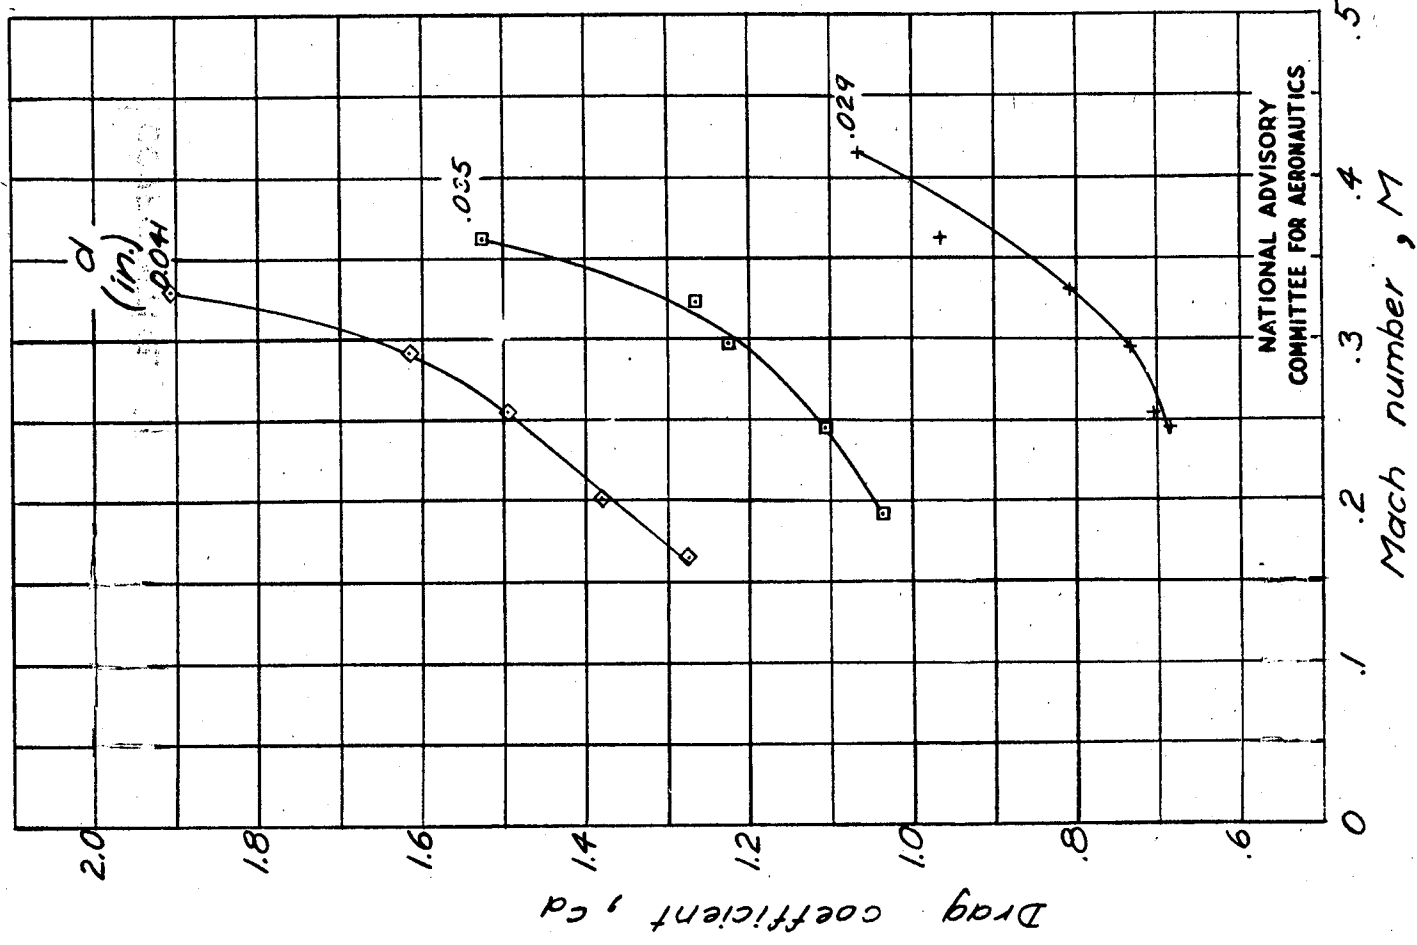
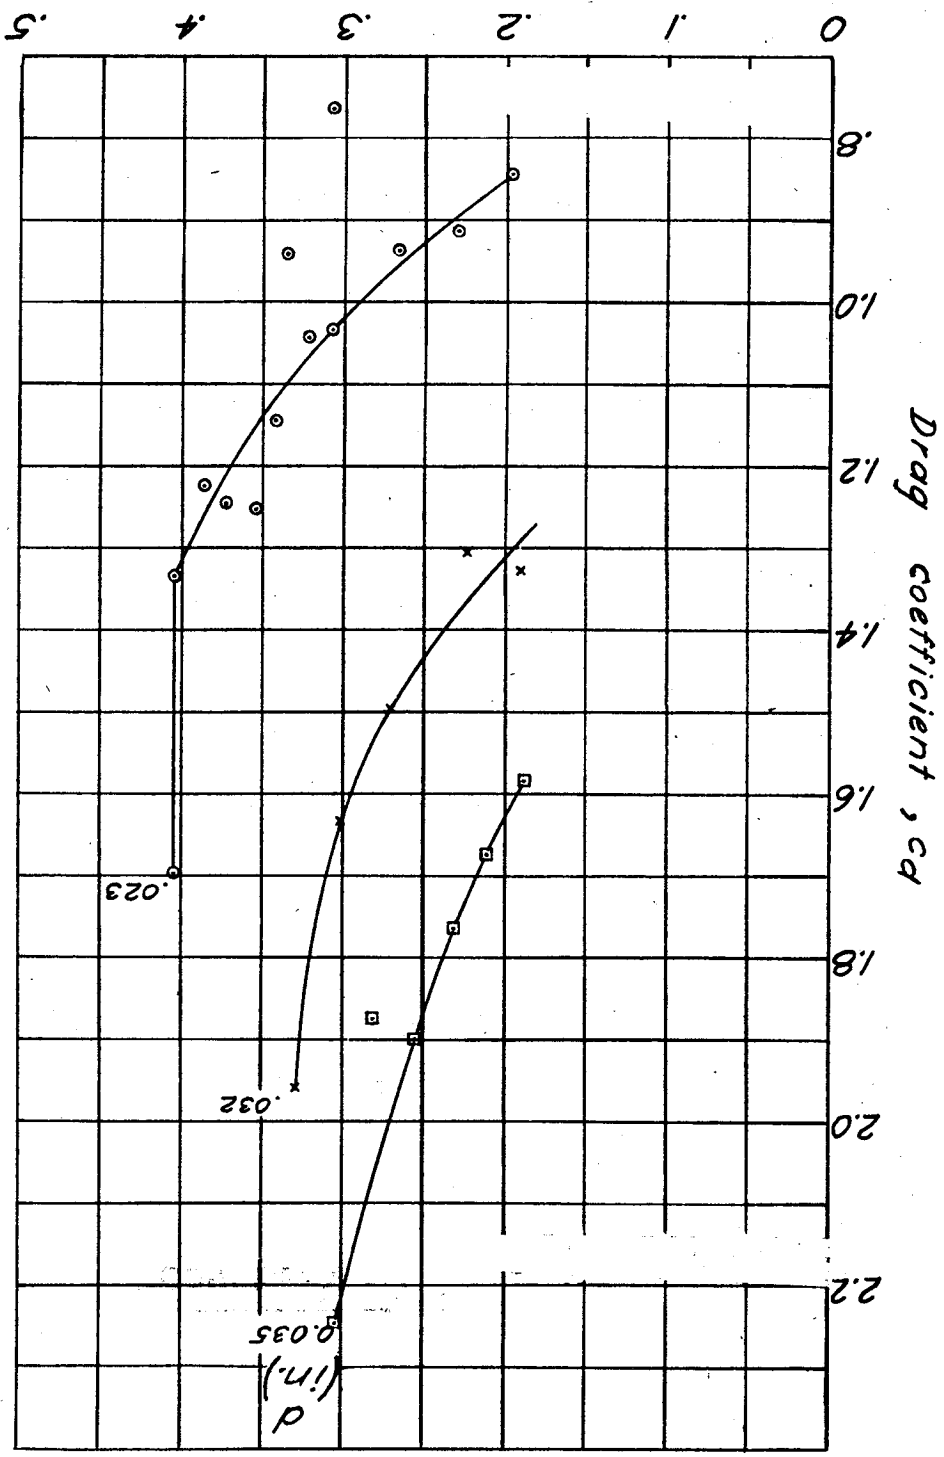


Figure 6. - Continued.

17

Figure 6. - Continued.
 (d) $m = 9$.
 Mach number, M

NATIONAL ADVISORY
 COMMITTEE FOR AERONAUTICS



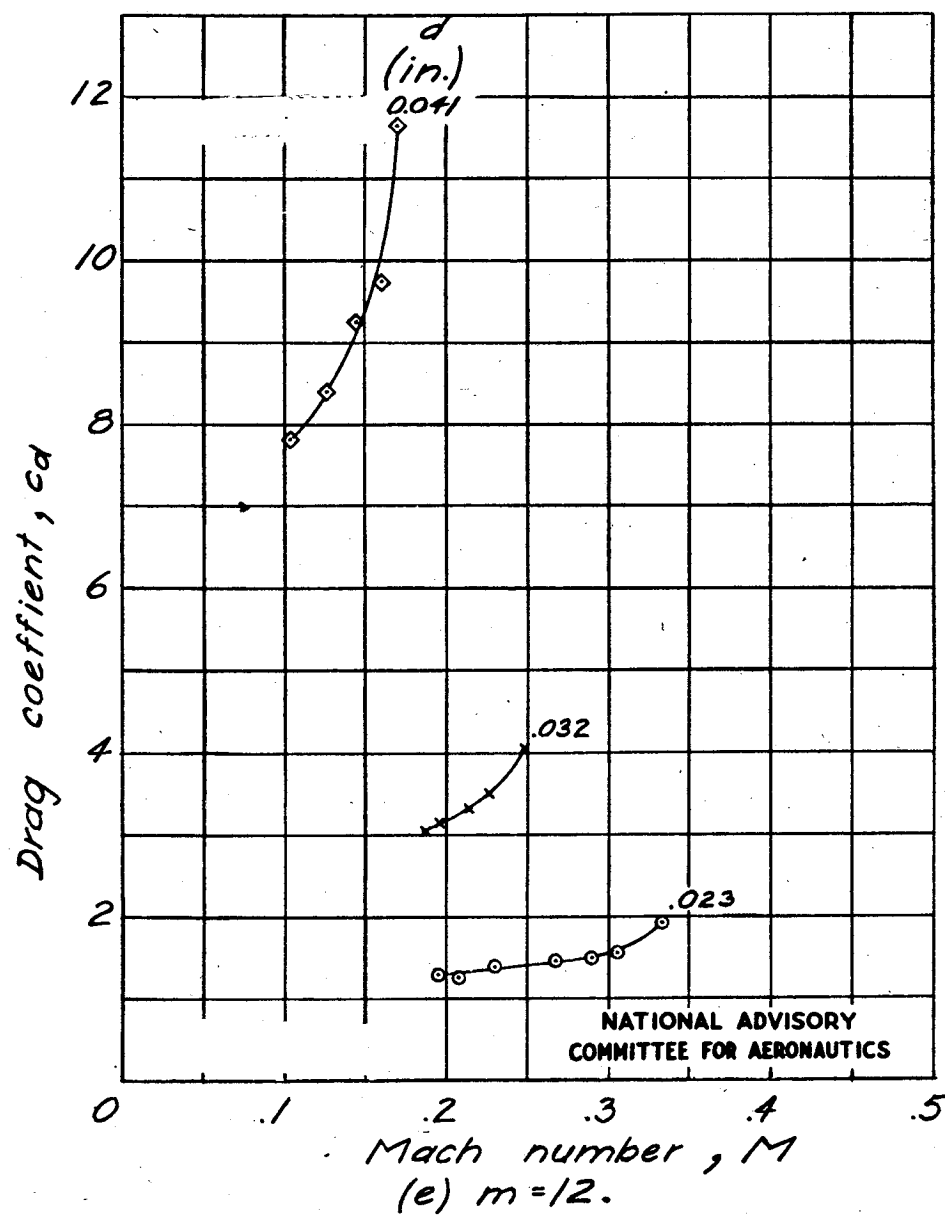


Figure 6.- Concluded.

Fig. 7

0371220

NACA CB No. L5F28

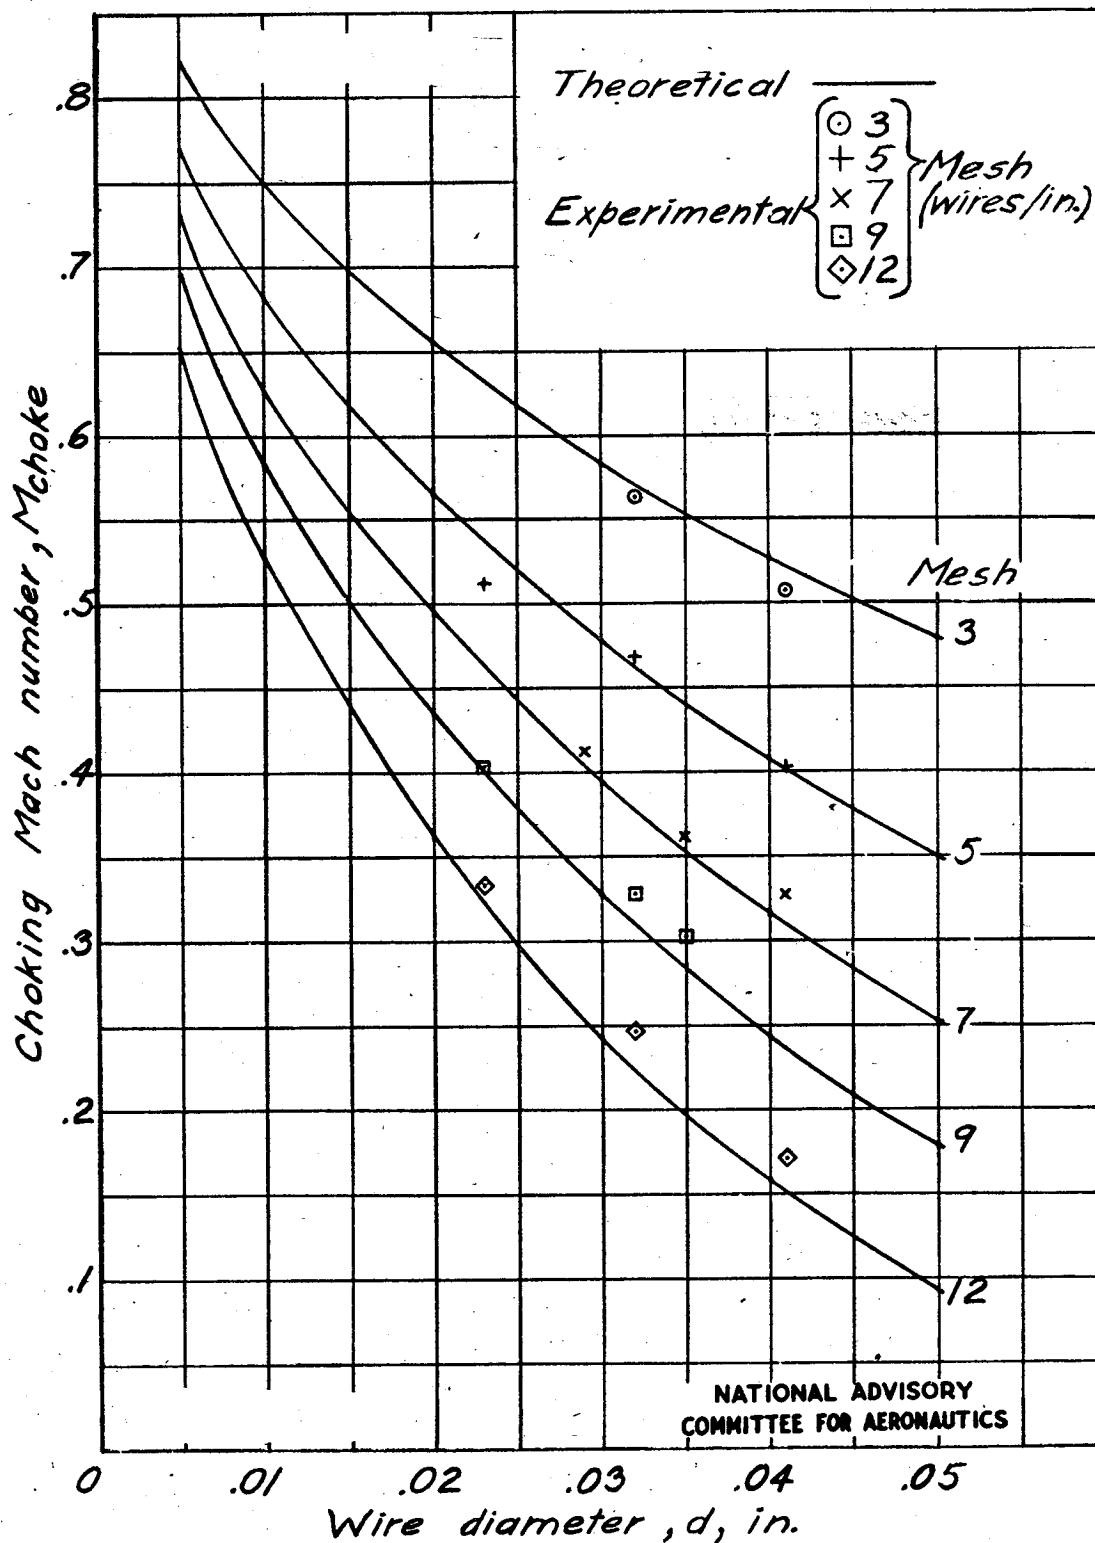


Figure 7. - Choking Mach number for screens of various meshes and wire diameters.

Choking Mach number, M_{choke}

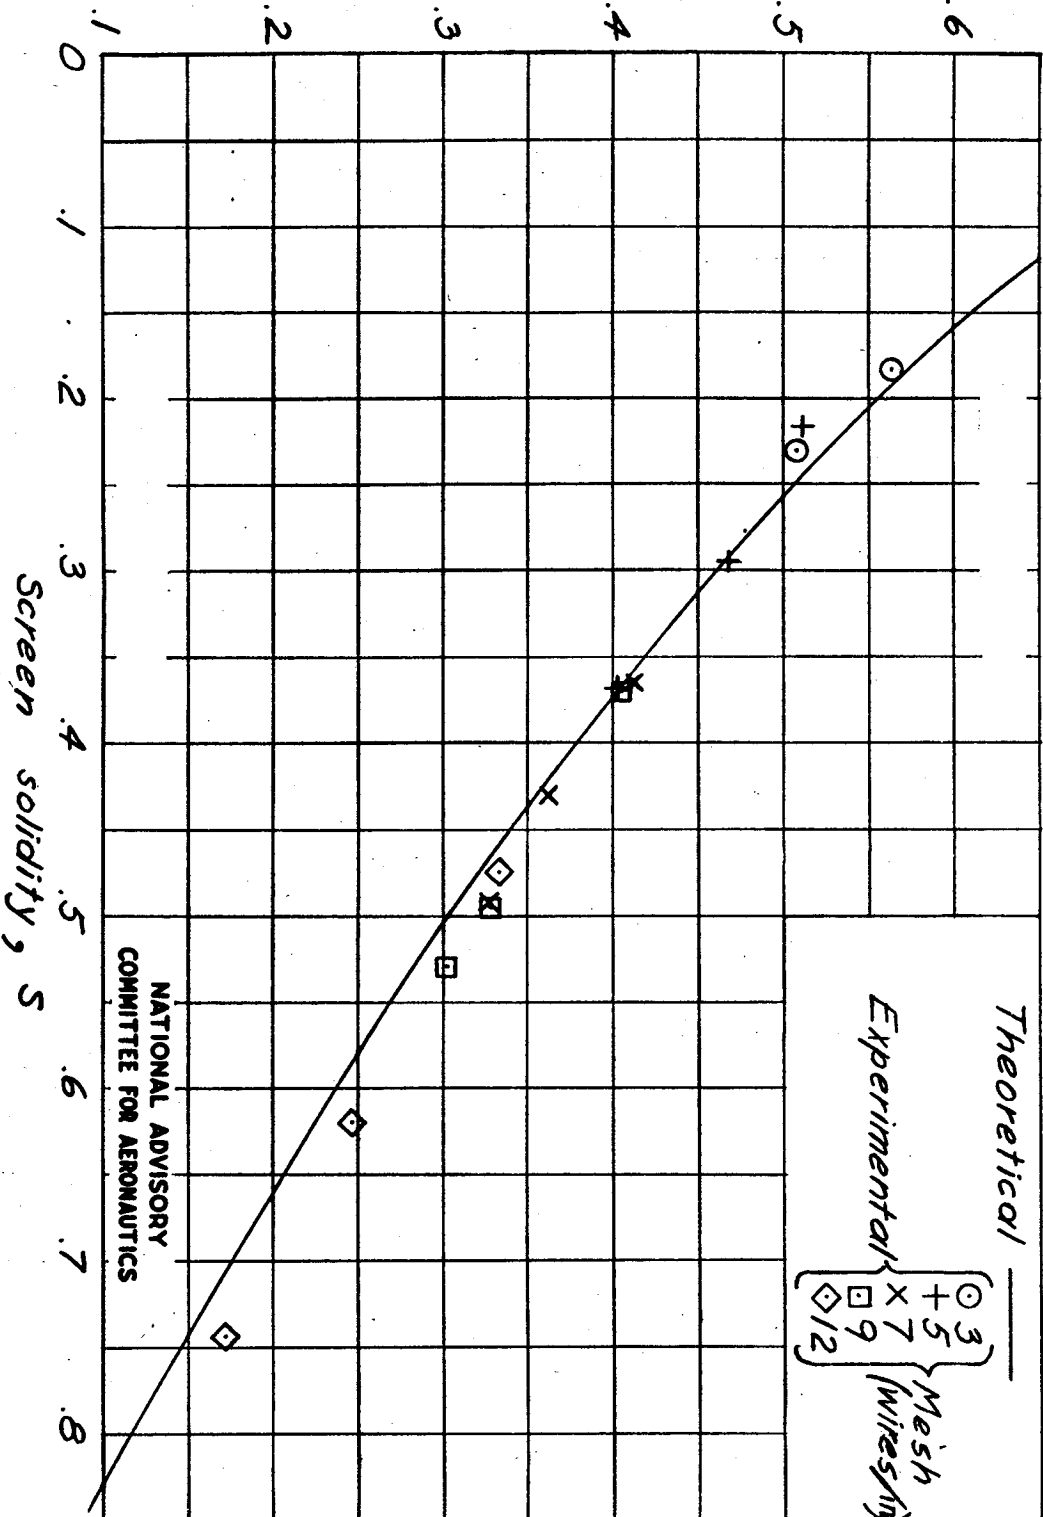


Figure 8. - Variation of choking Mach number with screen solidity.

0371220 1930

NTIS does not permit return of items for credit or refund. A replacement will be provided if an error is made in filling your order, if the item was received in damaged condition, or if the item is defective.

Reproduced by NTIS
National Technical Information Service
U.S. Department of Commerce
Springfield, VA 22161

**This report was printed specifically for you
order from our collection of more than 1.5
million technical reports.**

For economy and efficiency, NTIS does not maintain stock of its vast collection of technical reports. Rather, most documents are printed for each order. Your copy is the best possible reproduction available from our master archive. If you have any questions concerning this document or any order you placed with NTIS, please call our Customer Services Department at (703)487-4660.

Always think of NTIS when you want:

- Access to the technical, scientific, and engineering results generated by the ongoing multibillion dollar R&D program of the U.S. Government.
- R&D results from Japan, West Germany, Great Britain, and some 20 other countries, most of it reported in English.

NTIS also operates two centers that can provide you with valuable information:

- The Federal Computer Products Center - offers software and datafiles produced by Federal agencies.
- The Center for the Utilization of Federal Technology - gives you access to the best of Federal technologies and laboratory resources.

For more information about NTIS, send for our **FREE NTIS Products and Services Catalog** which describes how you can access this U.S. and foreign Government technology. Call (703)487-4650 or send this sheet to NTIS, U.S. Department of Commerce, Springfield, VA 22161. Ask for catalog, PR-827.

Name _____
Address _____

Telephone _____

NTIS

**- Your Source to U.S. and Foreign Government
Research and Technology.**

